

QUEEN-B MODEL BB PORTABLE HEATER (120 STYLE)
Z0037-00

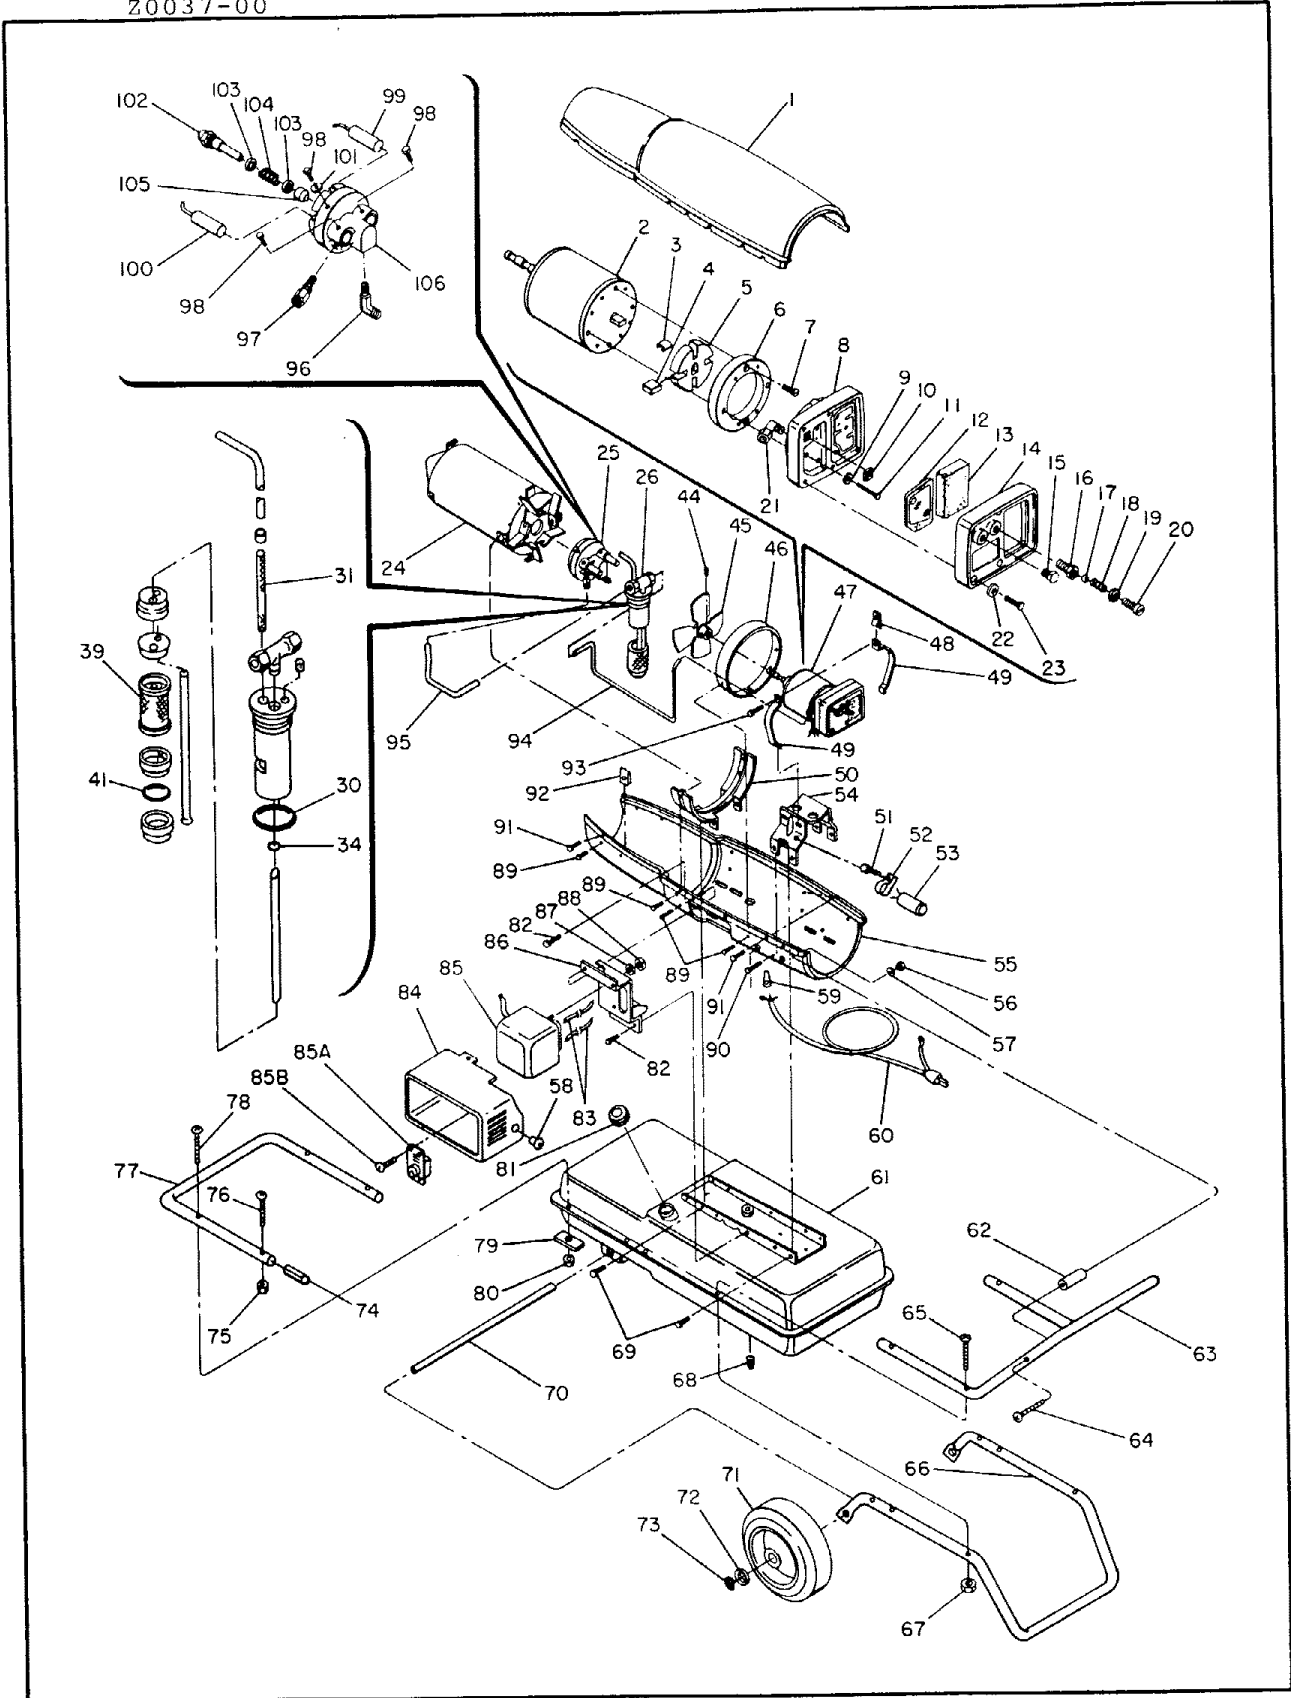


Figure 4. Heater, Exploded View

QUEEN-B MODEL BB PORTABLE HEATER (120 style)
Z0037-00

Index No.	Part No.	Part Name	Units Per Assy
1	M12827	Shell, Upper	1
2	M12811	Motor	1
3	M11966-5	Spring	1
4	M8643-3	Blade	4
5	M11969	Rotor	1
6	M8645-3	Pump Body	1
7	FHPF3-7C	Screw, Fil hd, 10-32 x 1/2 in.	2
8	M12233	End Cover, Pump	1
9	M9790-2	Washer	6
10	†M11637	Filter, Lint	1
11	M12461-34	Screw, Hex hd, 10-32 x 1-1/4 in.	6
12	†M12244G1	Filter Assy	1
13	†M12179	Intake Filter	1
14	M12234	End Cover	1
15	M10837	Pipe Plug	1
16	M10362	Connector	1
17	M8940	Ball, 1/4 dia	1
18	M8941	Spring, Compression	1
19	M8993	Hex, Nut, 3/8-24	1
20	M11941	Bushing, Pressure adjustment	1
21	M12865	Male Elbow	1
22	WL1-3	Lockwasher, Internal #10	4
23	M12461-31	Screw, Hex hd, 10-32 x 1 in.	4
24	M12934G1	Combustion Chamber Assy	1
25	†M12947G1	Burner Assy	1
26	M12729	Constant Level Assy	1
30	M12732	O-Ring	1
31	M12733	Screen, Filter	1
34	M12736	O-Ring	1
39	M12741	Screen, Filter	1
41	M12744	O-Ring	1
44	No Number	Setscrew, Socket hd, cup pt, 1/4-28	2
45	†M13038	Fan	1
46	M12830	Fan Housing	1
47	†M12864G1	Motor Package Assy	2
48	M11271-2	Nut, Tinnerman	4
49	M10964-1	Clamp, Motor	1
50	M12828	Bracket, Shell Support	1
51	M10908-51	Screw, 10-24 x 1/2 type S	1
52	M12651	Clamp, Tinnerman	1
53	M12650	Capacitor	1
54	M12829	Bracket, Motor Support	1
55	M12826	Shell, Lower	2
56	NEC-3C	Nut, 10-24	2
57	WP-3C	Washer	1
58	M11143-1	Bushing, Strain Relief	3
59	69321-61	Connector	1
60	M10813G16	Extension Cord Assy	1
61	M12820G1	Fuel Tank Assy	2
62	M12508-4	Spacer, Leg	1
63	M13171G1	Handle Assy, Rear	2
64	M12345-52	Screw, Mach, oval hd, 10-24 x 3 in.	4
65	M12345-34	Screw, Mach, oval hd, 10-24 x 2 in.	2
66	M12831	Frame, Support, wheel	6
67	NEC-3C	Nut, 10-24	1
68	M8257	Plug	8
69	M10908-51	Screw, 10-24 x 1/2 in.	1
70	M12867	Axle	2
71	M12663	Wheel	2
72	WP-8C	Washer	2
73	M12665	Retainer	2
74	M12336	Sleeve, Alignment	4
75	NEC-3C	Nut, 10-24	2
76	M12345-34	Screw, Mach, oval hd, 10-24 x 2 in.	1
77	M12833	Handle, Front	1

Item No.	Part No.	Part Name	Units Per Assy
78	M12345-31	Screw, Mach, oval hd, 10-24 x 1-1/4 in.	2
79	M12367	Plate, Clamp	2
80	NEC-3C	Nut, 10-24	4
81	M3353	Cap, Fuel Tank	1
82	M10908-51	Screw, 10-24 x 1 in.	4
83	M10816G12	Lead Assembly, Electrode	2
84	M12835	Cover, Transformer	1
85	M3259-4	Transformer	1
85A	M12611	Thermostat	1
85B	M12749-24	Screw, 10-24 x 3/8 in.	4
86	M12836G1	Mounting Plate Assy	1
87	WLM-4	Lockwasher, 1/4 in.	2
88	NCP-4C	Nut, Hex, 1/4-20	2
89	M10908-52	Screw, 10-24 x 5/8 in.	4
90	M10908-51	Screw, 10-24 x 1/2 in.	4
91	M12467-51	Screw, 10-24 x 1/2 in.	6
92	M11271-4	Nut, Tinnerman	6
93	M12461-55	Screw, 10-24 x 1 in.	2
94	M12844	Airline	1
95	M12747	Airline	1
96	69248	Elbow	1
97	M12949	Connector	1
98	HF3-3C	Screw, 10-32 x 3/8 in.	3
99	M12952	Electrode RH	1
100	M12951	Electrode LH	1
101	WP-3C	Washer, Flat	1
102	M12959	Nozzle, Siphon	1
103	M10659-1	Washer, Nozzle Seal	2
104	M10809	Spring, Nozzle Seal	1
105	M8882	Sleeve	1
106	M12948G1	Burner Head Assy	1
	M13039	Decal, Wiring Diagram and Maintenance	1
	M12653	Decal, Trade Name	1
	M12926	Decal, Nameplate and Operator Instructions	1
	M12530	Decal, Air Filter	1
	M12604	Decal, Caution	1
	M13142	Decal, Cover Removal	1

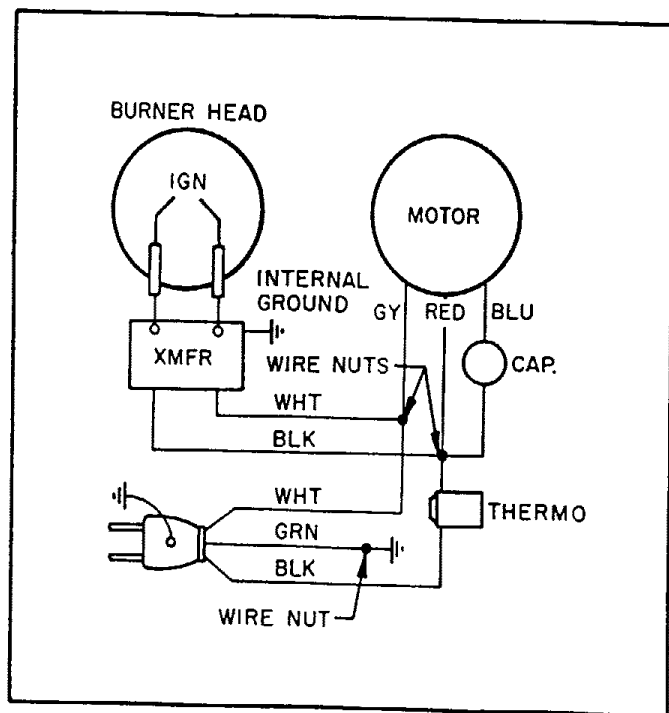


Figure 2. Wiring Diagram